

155Mbps BIDI SFP Transceiver

Product description

Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA). They simultaneously comply with SONET OC-3 and SDH STM-1. They are RoHS compliant and lead-free.



Features

- Single LC receptacle optical interface compliant
- Hot-pluggable SFP footprint
- 1310nm FP laser transmitter
- RoHS compliant and Lead Free
- Up to 20 km on 9/125um SMF
- Metal enclosure for lower EMI
- Single +3.3V power supply
- Low power dissipation <600mW
- Commercial operating temperature range: 0°C to +70°C

Applications


- SONET OC-3/SDH STM-1
- Fast Ethernet

Pin Description

Pin	Symbol	Name/Description	Ref.
1	VeeT	Transmitter Ground (Common with Receiver Ground)	1
2	TX Fault	Transmitter Fault	
3	TX Disable	Transmitter Disable. Laser output disabled on high or Open	2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID	3
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID	3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module	3
7	Rate Select	No connection required	
8	LOS	Loss of Signal indication. Logic 0 indicates normal Operation	4
9	VeeR	Receiver Ground (Common with Transmitter Ground)	1
10	VeeR	Receiver Ground (Common with Transmitter Ground)	1
11	VeeR	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VeeR	Receiver Ground (Common with Transmitter Ground)	1
15	VccR	Receiver Power Supply	
16	VccT	Transmitter Power Supply	
17	VeeT	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled	
19	TD-	Transmitter Inverted DATA in. AC Coupled	
20	VeeT	Transmitter Ground (Common with Receiver Ground)	1

Notes

1. Circuit ground is internally isolated from chassis ground.
2. Laser output disabled on TX Disable $>2.0V$ or open, enabled on TX Disable $<0.8V$.
3. Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.
4. LOS is LVTTL output. Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

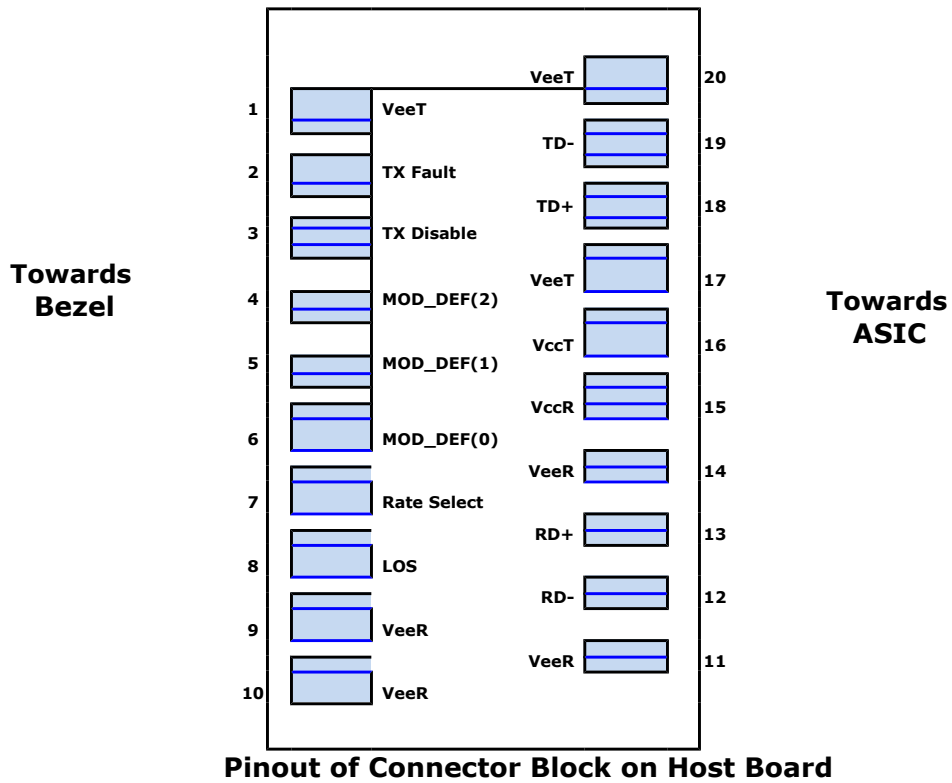

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Maximum	Vcc	-0.5		+4.0	V	
Storage Temperature	TS	-40		+100	°C	
Case Operating Temperature	TOP	0		+70	°C	
Relative Humidity	RH	0		85	%	1

Electrical Characteristics ($T_{OP}=25^{\circ}C$, $V_{CC}=3.3Volts$)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Supply Voltage	V_{CC}	3.00		3.60	V	
Supply Current	I_{CC}		180	300	mA	
Transmitter						
Input differential impedance	R_{in}		100		Ω	2
Single ended data input swing	$V_{in, pp}$	250		1200	mV	
Transmit Disable Voltage	VD	$V_{CC}-1.3$		V_{CC}	V	
Transmit Enable Voltage	VEN	V_{EE}		$V_{EE}+0.8$	V	
Transmit Disable Assert Time				10	us	

Receiver

Single ended data output swing	Vout, pp	300	400	800	mV	3
Data output rise time	tr			300	ps	4
Data output fall time	tf			300	ps	4
LOS Fault	VLOS fault	Vcc – 0.5		VccHO ST	V	5
LOS Normal	VLOS norm	Vee		Vee+0.5	V	5
Deterministic Jitter Contribution	RXDJ			80	ps	6
Total Jitter Contribution	RXTJ			122.4	ps	

Notes:

1. Non condensing.
2. AC coupled.
3. Into 100 ohm differential termination.
4. 20 – 80 %
5. LOS is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and ΔDJ.

Optical Characteristics (TOP=25°C, Vcc=3.3 Volts)

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Transmitter						
Output Opt. Power	PO	-15	-	-8	dBm	1
Optical Wavelength	λ	1290	¹³¹ 0	1330	nm	
Spectral Width	σ	-	-	3	nm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Optical Rise/Fall Time	tr/tf	-	-	500	ps	2
Deterministic Jitter Contribution	TXDJ	-	-	0.07	UI	
Total Jitter Contribution	TXTJ	-	-	0.007	UI	
Optical Extinction Ratio	ER	10	-	-	dB	
Receiver						
Average Rx Sensitivity @ 155Mbps	RSENS	-	-	-32	dBm	4,5

Maximum Receiver Power	RXMA X	-2	-	-	dBm	
Optical Center Wavelength	Λ_c	1530	1550	1570	nm	
LOS De-Assert	LOSD	-	-	-32	dBm	
LOS Assert	LOSA	-50	-	-	dBm	
LOS Hysteresis		0.5	-	-	dB	
Isolation Between Transmitter and Receiver		30	-	-	dB	

Notes:

1. Class 1 Laser Safety.
2. Unfiltered, 20-80%.
3. Measured with DJ-free data input signal .In actual application, output DJ will be the sum of input DJ and ΔDJ .
4. Measured with conformance signals defined in FC-PI-2 Rev. 10.0 specifications.
5. Measured with PRBS $2^{23} - 1$ at 10⁻¹² BER.

General Specifications

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Date Rate	BR	-	-	155	mbps	1
Bit Error Rate	BER	-	-	10 ⁻¹²		2
Max. Supported Link Length on 9/125 μ m SMF @ 155M	LMAX	-	-	20	km	3, 4

Notes:

1. SONET OC-3 and SDH STM-1compliant.
2. Tested with a PRBS $2^{23} - 1$ data pattern.
3. Dispersion limited per FC-PI-2 Rev. 10
4. Attenuation of 0.55 dB/km is used for the link length calculations. Please refer to the Optical Specifications in Table IV to calculate a more accurate link budget based on specific conditions in your application.

Environmental Specifications

The Commercial Temperature BIDI SFP transceivers have an operating temperature range from 0°C to +70°C case temperature.

Parameter	Symbol	Min	Typ	Max	Unit	Ref.
Case operating Temperature	Top	0		+70	°C	
Storage Temperature	Tsto	-40		+100	°C	

Mechanical Specifications:

The Small Form Factor Pluggable (SFP) transceivers are compatible with the dimensions defined by the SFP Multi-Sourcing Agreement (MSA).